


AC/DC Current Clamp Probe

- CP024

- + 4A to 400A test range
- + Error by earth magnetic: $\pm 30\text{mA}$ max
- + Remanence ($\pm 100\text{A}/10\text{A}$): $\pm 30\text{mA}$ max
- + Bandwidth: DC 200KHz ($\pm 3\text{dB}$)
- + Jaw size: 23mm (Max)
- + Auto Zero at power on
- + Low battery indication



Product Details

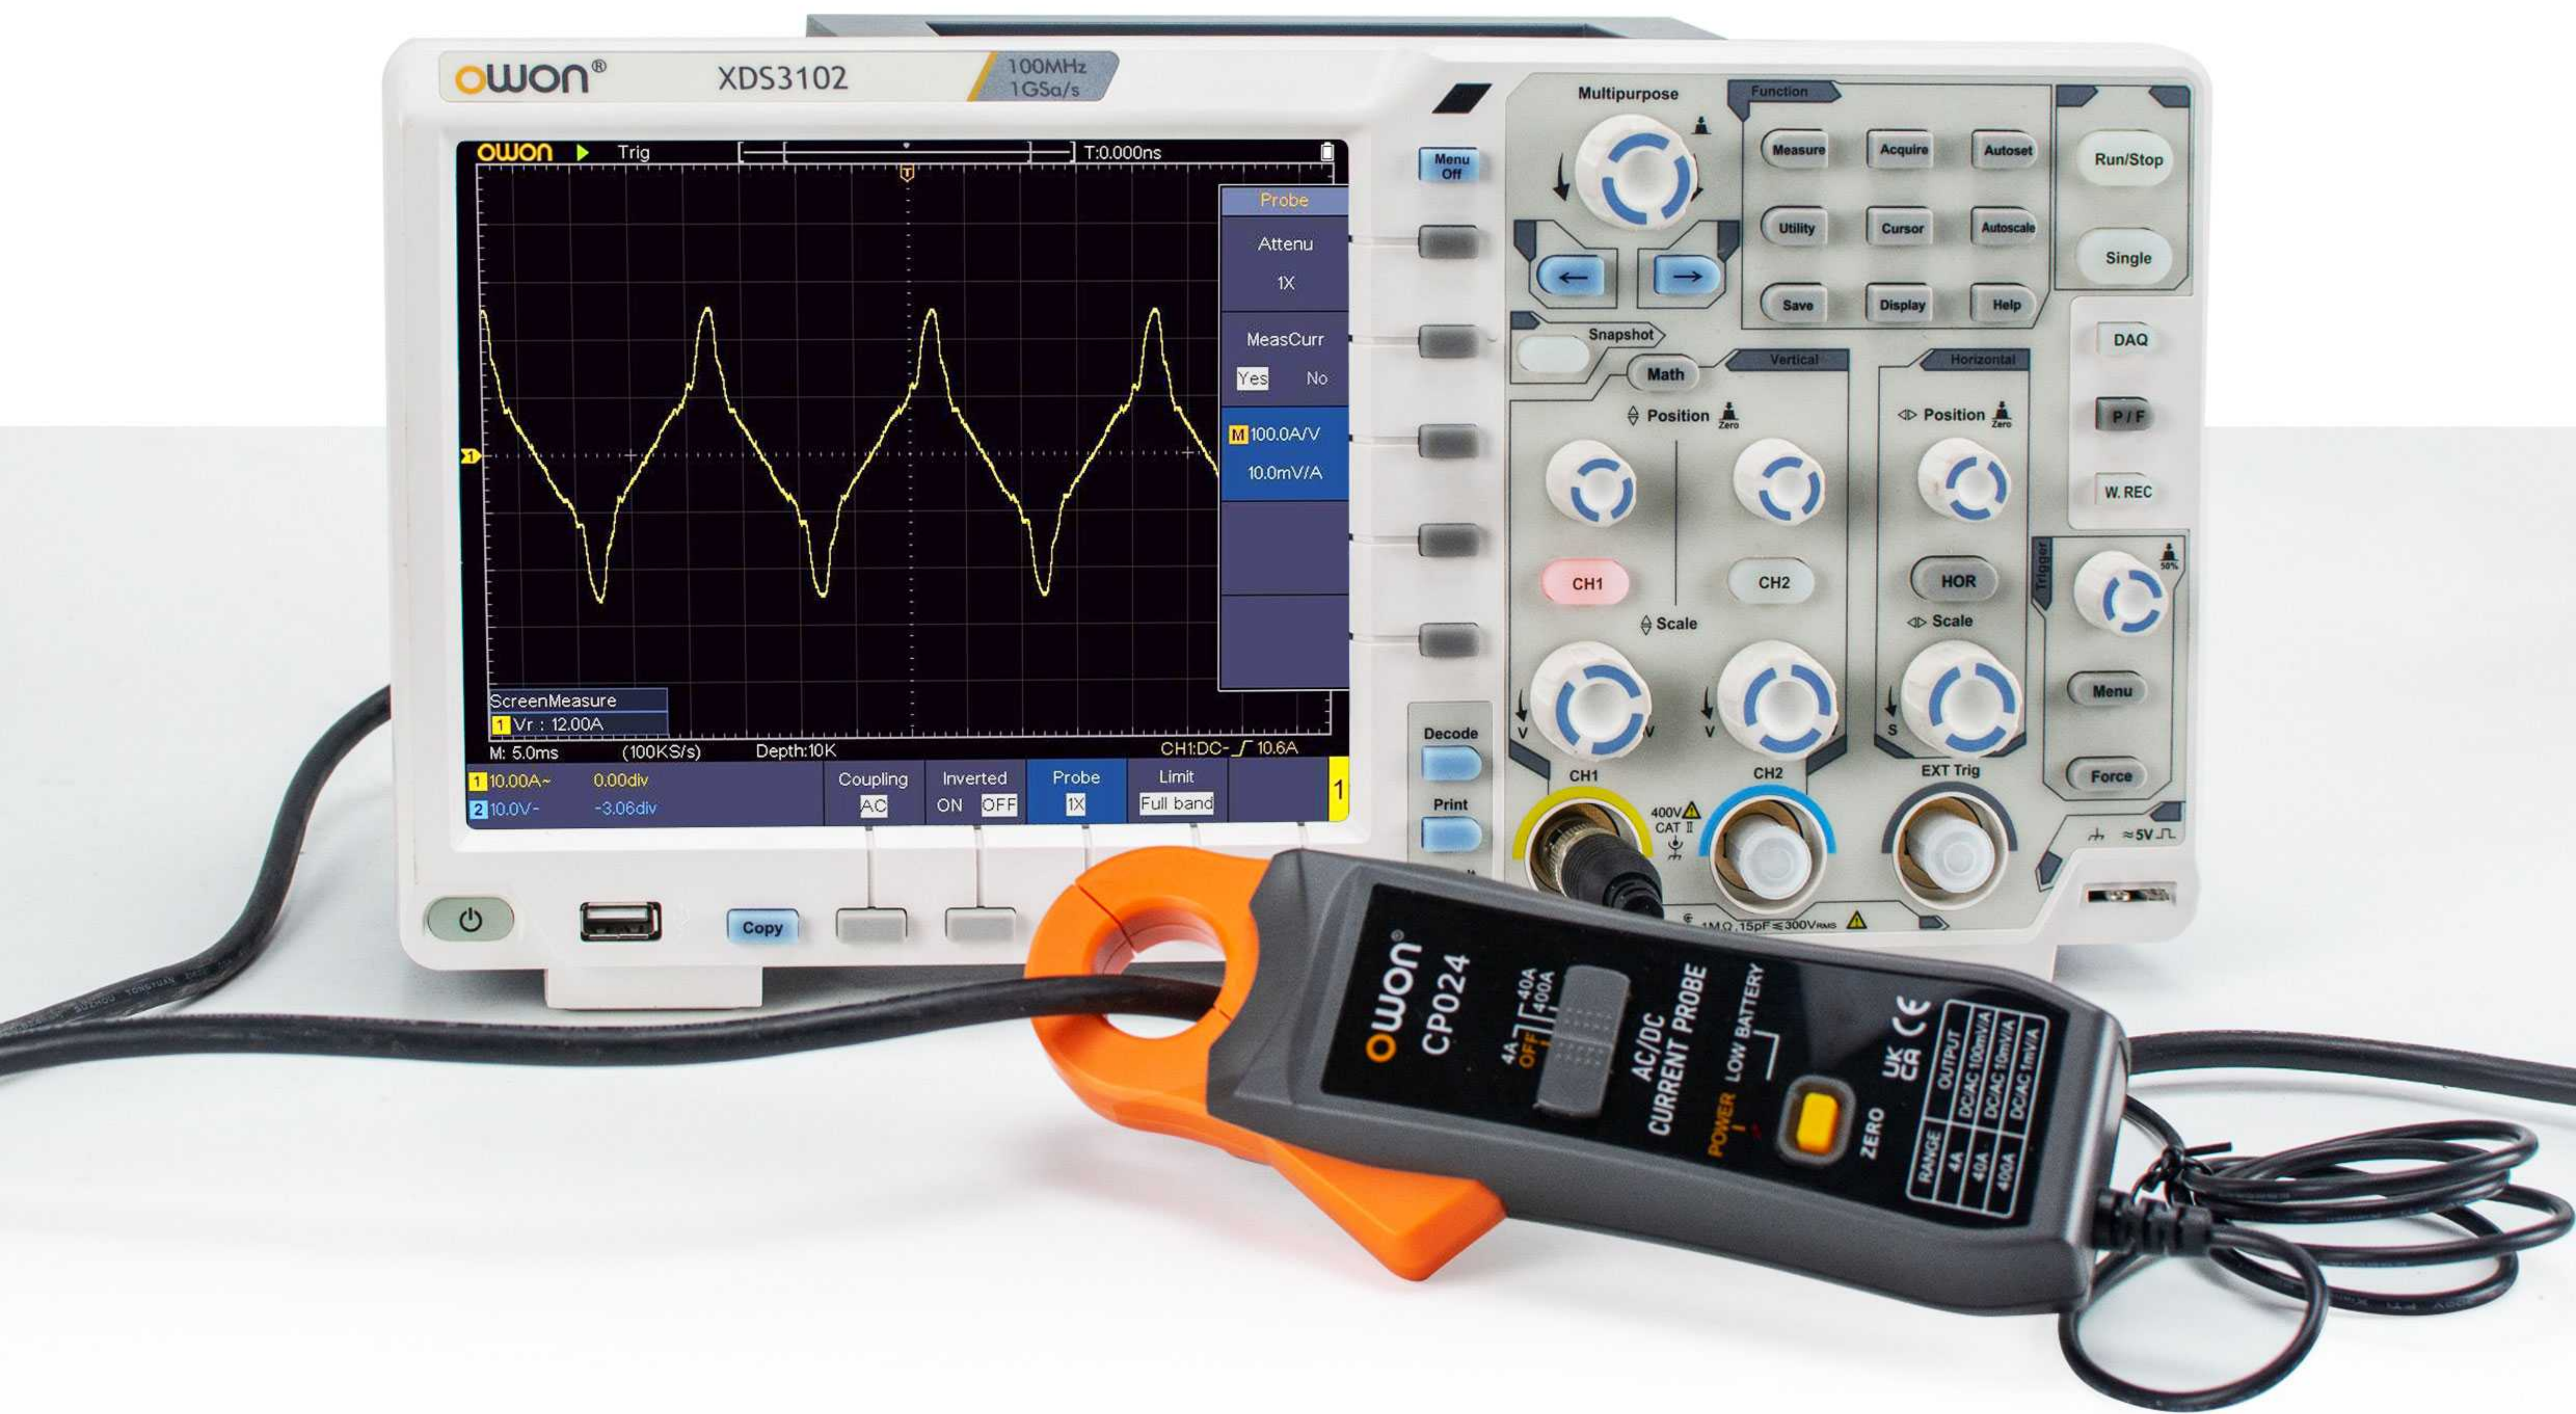

• FRONT

• BACK




Standard insulated BNC interface, common to all brands of oscilloscopes.

**Three-gear switch:
4A / 40A / 400A**

**9V battery compartment,
easy to replace.**



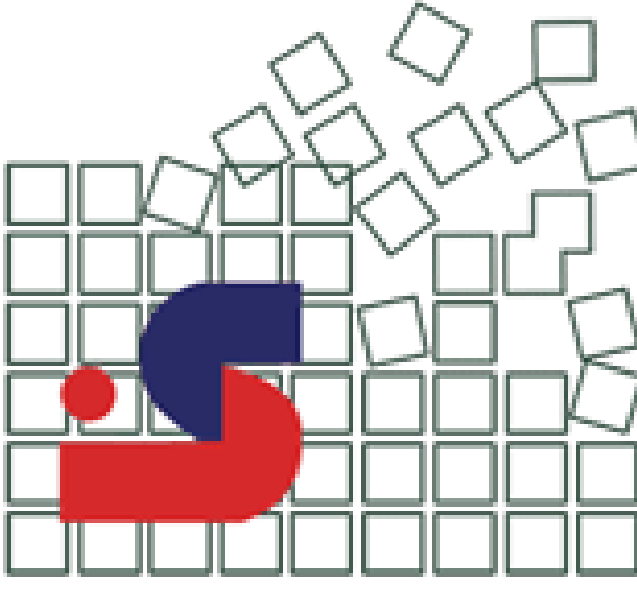

Specifications

DC Current

Range	Sensitivity	Accuracy
DC 4A	1 mV/10 mA	$\pm(1.5\%rdg\pm 5d)$
DC 40A	1 mV/ 0.1A	$\pm(1.5\%rdg\pm 5d)$
DC 300A	1 mV/ 1A	$\pm(1.5\%rdg\pm 5d)$
DC 300 - 400A	1 mV/ 1A	$\pm(3.5\%rdg\pm 5d)$

AC Current

Range	Sensitivity	Accuracy
AC 4A	1 mV/ 10mA	$\pm(2.0\%rdg\pm 5d)$
AC 40A	1 mV/ 0.1A	$\pm(2.0\%rdg\pm 5d)$
AC 300A	1 mV/ 1A	$\pm(2.0\%rdg\pm 5d)$
AC 300A - 400A	1 mV/ 1A	$\pm(3.5\%rdg\pm 5d)$

General Specifications


Power supply	9V (6LR61) Battery (optional)
Dimension(W*H*D)	180 x 68 x 32 (mm)
Device Weight	About 250 g
Operating Temperature	0°C to 50°C, $\leq 70\%RH$

Specifications subject to change without prior notice.

Accessories



شرکت صائن
WWW.SAENCO.COM
021 88936611

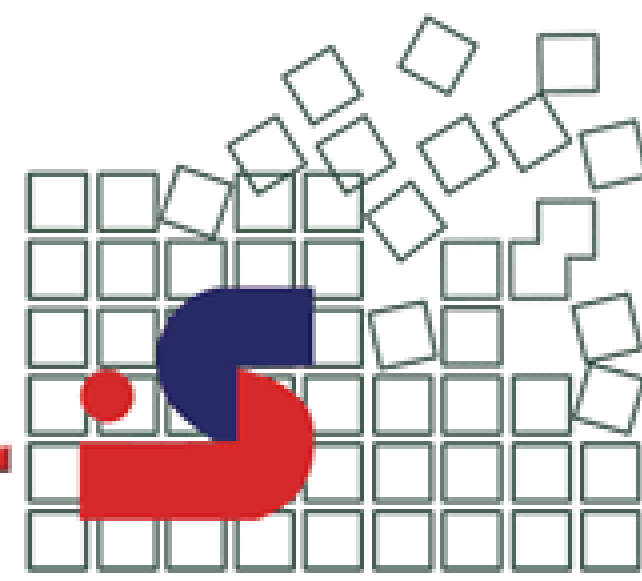

- 1 CP024
- 2 Battery (optional)
- 3 Quick Guide
- 4 Soft Bag
- 5 Packaging (Lx W x H): 100 x 45 x 220mm